


QUICK

LOCK

Technical Datasheet

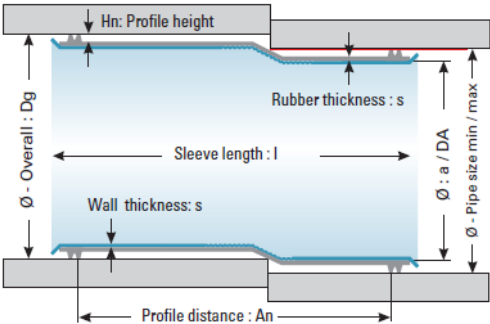

QUICK-LOCK FLEX DN 200- DN 800

Quick-Lock FLEX	EPDM seal	sleeve-length	total diameter rolled (with seal)	Suitable for pipes from / to		Stainless steal sleeve			seal			max. radial offset size	Installationpacker	seal thickness incl. seal nubs	total weight (sleeve with seal)
				Pipe ID min.	Pipe ID max.	Wall thickness	Ø Pipe rolled	max. expanded diameter	seal-thickness	Height of seals	Height of seals				
mm DN	mm DN	mm l	mm DG	mm min DN	mm max DN	mm s	mm da	mm DA	mm s	mm Hn	mm An	mm bis zu	mm VP	mm	kg
200	200	360	173	196	207	1,2	159	202	2,0	5,0	320	20	VP 150-200 VFWL	7,0	2,47
250	250	360	215	247	261	1,2	199	252	2,0	6,0	315	20	VP 200-300 VFWL	8,0	3,13
300	300	360	252	293	313	1,2	234	300	2,0	7,0	310	25	VP 200-300 VFWL	9,0	3,71
380	350	360	322	367	386	1,5	304	377	2,0	7,0	310	25	VP 350-500 VFWL	9,0	5,30
400	400	360	347	390	415	1,5	327	405	2,0	8,0	310	25	VP 350-500 VFWL	10,0	5,75
450	450	360	387	438	464	2,0	367	455	2,0	8,0	395	25	VP 350-500 VFWL	10,0	11,10
500	500	460	450	487	515	2,0	428	505	2,0	9,0	385	25	VP 350-500 VFWL / VP 500-600 VFWL	11,0	12,15
600	600	460	542	582	617	2,0	519	607	2,5	9,0	390	25	VP 500-600 VFWL	11,5	14,80
700	700	460	593	675	725	2,0	570	709	2,5	9,0	375	25	VP 600-800 VFWL	11,5	17,80
800	700	460	597	760	804	2,0	574	818	2,5	9,0	375	25	VP 600-800 VFWL	11,5	21,60

Version: 14.11.2024, Errors and omissions are excepted.