


Technical Datasheet for
Quick-Lock PRESSURE PIPE LinerEnd (HD)

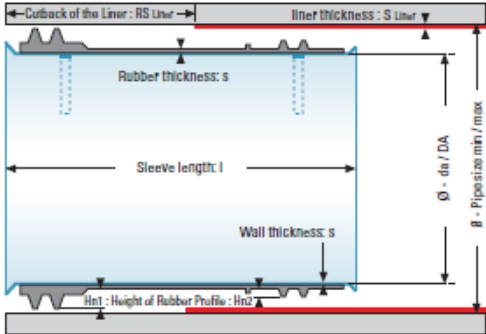

QUICK-LOCK PRESSURE PIPE LinerEnd (HD) DN **6"**- DN **32"**

Quick-Lock LinerEnd	Silicone seal	sleeve length	total diameter rolled (with seal)	Suitable for pipes from / to		Stainless steal sleeve			Silicone-seal			Linerthickness min - max	Liner trim length	total weight (sleeve with seal)
				Pipe ID min.	Pipe ID max.	Wall thickness	Ø Pipe rolled	max. expanded diameter	seal- thickness	Height of seals				
inch DN	inch DN	inch l	inch DG	inch min DN	inch max DN	inch s	inch da	inch DA	inch s	inch Hn1	inch Hn2	inch S Leiner	inch RS Liner	lbs
6"	6"	9,84"	5,39"	5,75"	6,30"	0,0472"	4,69"	5,75"	0,079"	0,35"	0,16"	0,12" - 0,31"	5,12" - 5,51"	2,93
6,9"	6,9"	9,84"	6,30"	6,73"	7,48"	0,0472"	5,59"	6,89"	0,079"	0,35"	0,16"	0,12" - 0,31"	5,12" - 5,51"	4,19
8"	8"	9,84"	7,09"	7,56"	8,35"	0,0591"	6,30"	7,83"	0,079"	0,39"	0,16"	0,12" - 0,35"	5,12" - 5,51"	4,59
8,9"	8,9"	9,84"	8,11"	8,35"	9,37"	0,0591"	7,32"	8,90"	0,079"	0,39"	0,16"	0,12" - 0,35"	5,12" - 5,51"	5,31
10"	10"	9,84"	8,94"	9,37"	10,43"	0,0591"	8,07"	9,92"	0,079"	0,43"	0,16"	0,12" - 0,35"	5,12" - 5,51"	6,31
10,8"	10,8"	9,84"	10,04"	10,43"	11,50"	0,0591"	9,17"	10,87"	0,079"	0,43"	0,16"	0,12" - 0,35"	5,12" - 5,51"	6,46
12"	12"	9,84"	11,10"	11,42"	12,56"	0,0591"	10,24"	12,01"	0,079"	0,43"	0,16"	0,12" - 0,35"	5,12" - 5,51"	6,97
14"	14"	9,84"	12,09"	12,56"	14,13"	0,0787"	11,22"	13,58"	0,079"	0,43"	0,16"	0,12" - 0,35"	5,12" - 5,51"	9,46
16"	16"	9,84"	13,54"	14,13"	16,26"	0,0787"	12,68"	15,63"	0,079"	0,43"	0,16"	0,12" - 0,35"	5,12" - 5,51"	10,76
18"	18"	11,81"	15,63"	16,26"	18,90"	0,0787"	14,61"	18,15"	0,079"	0,51"	0,20"	0,12" - 0,43"	6,69" - 7,09"	19,75
20"	20"	11,81"	18,23"	18,90"	21,34"	0,0787"	17,20"	20,55"	0,079"	0,51"	0,20"	0,12" - 0,43"	6,69" - 7,09"	21,74
24"	24"	11,81"	20,63"	21,34"	24,21"	0,0787"	19,61"	23,43"	0,079"	0,51"	0,20"	0,16" - 0,47"	6,69" - 7,09"	25,02

¹ The liner thickness is the actual measured thickness of the liner including annula gap, outer foil, etc.